



FRONT
SCALE 5 / 8

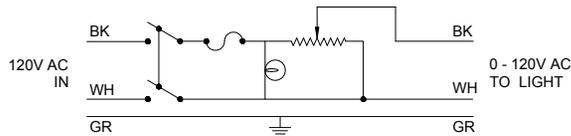

WIRING SCHEMATIC

SPECIFICATIONS	
P/N	LD4864-1
MODEL	HYL 80-1SRDO (120V)
INPUT SPECIFICATIONS	120V AC, 50/60 Hz, 1A
OUTPUT SPECIFICATIONS	0-120V AC
FEATURES	
<ul style="list-style-type: none"> - CABINET MOUNTED POWER SUPPLY, NEMA TYPE 1/ IP20. - FULL RANGE DIMMER CONTROL OF LIGHT, 0-100% INTENSITY. - MAX. RECOMMENDED DISTANCE BETWEEN PSU AND LIGHT IS 500 FT. [152 m] WITH 16 AWG / 1.5mm² SHIELDED WIRE. - 16 FT. [4.8 m] PIGTAILED (FLYING LEAD) OUTPUT CABLE TO LIGHT SOURCE. 	

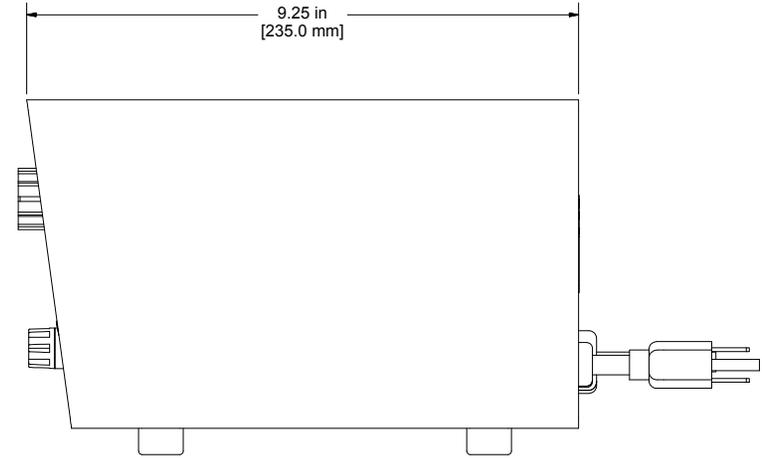

NOTES:

1. ALL INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTICE.

NOTICE
THIS DRAWING IS THE PROPERTY OF J.M. CANTY AND MUST BE RETURNED WITHOUT REPRODUCTION OR DUPLICATION. AT ANY TIME UPON REQUEST, BUT IN ANY EVENT AS SOON AS IT HAS SERVED THE PURPOSE FOR WHICH IT WAS FURNISHED. WHILE IN THE POSSESSION OF THE RECIPIENT, IT MUST BE PROPERLY SAFEGUARDED AGAINST DISCLOSURE TO ANYONE EXCEPT THOSE EMPLOYEES WHO REQUIRE IT FOR WORK OR JOB. THE RECIPIENT MUST KEEP CONFIDENTIAL AND REQUIRE HIS (HER) EMPLOYEES TO KEEP CONFIDENTIAL THE INFORMATION CONTAINED HERE ON.

IMPORTANT
FOR THE REQUIRED MANUFACTURING SPECIFICATIONS SEE DOCUMENT #A4955

NOTE: FAILURE TO RECEIVE DOCUMENT DOES NOT WAIVE VENDOR RESPONSIBILITY

DRAWN BY JD	DATE 1/26/2011
APPROVAL JD	DATE 1/26/2011
ENGINEERING ANALYSIS CURRENT	DATE
MFG. APPROVAL PENDING	DATE
QUALITY CONTROL I.O.A.	DATE

J.M. CANTY INC. 6100 DONNER RD. BUFFALO, N.Y. 14094 U.S.A.		CANTY WWW.JMCANTY.COM	J.M. CANTY INTL. LTD. BALLYCOOLIN BUS. PK. BLANCHARDSTOWN DUBLIN 15, IRELAND
TITLE POWER SUPPLY SPECIFICATION, P/N LD4864-1, HYL 80-1SRDO POWER SUPPLY, 120V AC			
SIZE	REVISION C 1	FILE NAME C10866	
SCALE	AS NOTED	SHEET 1 OF 1	