






SPECIFICATIONS	
P/N	LC10753-310
MODEL	316L, HYL 52 PSU, 120V AC, INT. SW., 5 MIN., WP/IP
INPUT SPECIFICATIONS	120V AC, 50/60 Hz, 50VA
OUTPUT SPECIFICATIONS	12 VDC, 4.1A MAX.
FEATURES	
<ul style="list-style-type: none"> - 316L S.S. HOUSING POWER SUPPLY, WEATHER PROOF / IP67 - FULLY ADJUSTABLE SHUTOFF TIMER - 16 FT. [4.8 m] PIGTAILED (FLYING LEAD) INPUT CABLE - CABLE SEAL PROVIDED FOR OUTPUT TO LIGHT SOURCE 	

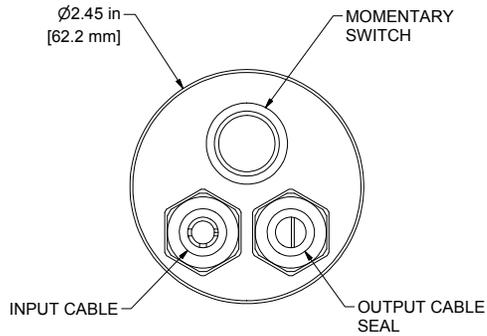


FRONT
SCALE 1 : 1

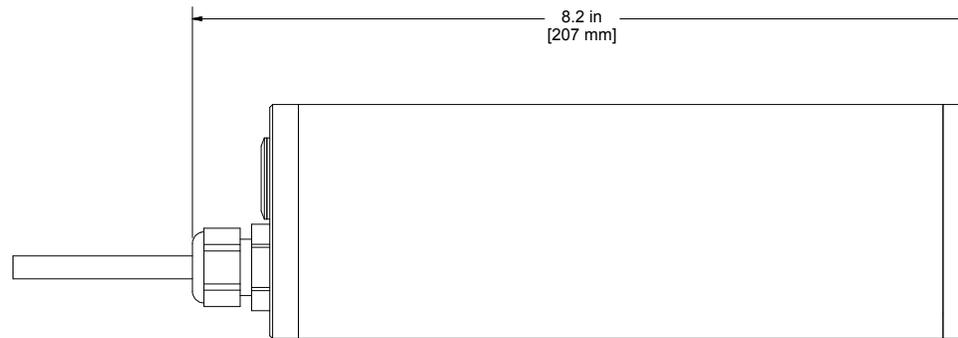

SIDE
SCALE 1 : 1



BACK
SCALE 1 : 1

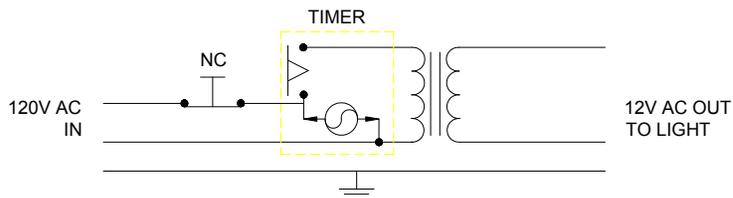

WIRING SCHEMATIC

NOTES:
1. ALL INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTICE.

NOTICE
THIS DRAWING IS THE PROPERTY OF J.M. CANTY AND MUST BE RETURNED WITHOUT REPRODUCTION OR DUPLICATION. AT ANY TIME UPON REQUEST, BUT IN ANY EVENT AS SOON AS IT HAS SERVED THE PURPOSE FOR WHICH IT WAS FURNISHED. WHILE IN THE POSSESSION OF THE RECIPIENT, IT MUST BE PROPERLY SAFEGUARDED AGAINST DISCLOSURE TO ANYONE EXCEPT THOSE EMPLOYEES WHO REQUIRE IT FOR WORK OR JOB. THE RECIPIENT MUST KEEP CONFIDENTIAL AND REQUIRE HIS (HER) EMPLOYEES TO KEEP CONFIDENTIAL THE INFORMATION CONTAINED HERE ON.

IMPORTANT
FOR THE REQUIRED MANUFACTURING SPECIFICATIONS SEE DOCUMENT #A4955

NOTE: FAILURE TO RECEIVE DOCUMENT DOES NOT WAIVE VENDOR RESPONSIBILITY

DRAWN BY	DATE
JD	2/28/2011
APPROVAL	DATE
JD	2/28/2011
ENGINEERING ANALYSIS	DATE
CURRENT	
MFG. APPROVAL	DATE
PENDING	
QUALITY CONTROL	DATE
I.O.A.	

J.M. CANTY INC.
6100 DONNER RD.
BUFFALO, N.Y. 14094
U.S.A.

CANTY
WWW.JMCANTY.COM

J.M. CANTY INTL. LTD.
BALLYCOOLIN BUS. PK.
BLANCHARDSTOWN
DUBLIN 15, IRELAND

TITLE
POWER SUPPLY SPECIFICATIONS, P/N LC10753-310, HYL 52-INT-SS-WP/IP (120V)

REVISION
0

FILE NAME
C11458

SCALE AS NOTED | SIZE C | SHEET 1 OF 1