

PROCESS TECHNOLOGY

LED SANITARY LIGHTING SYSTEM

Stainless Steel NEMA 4X Construction



FEATURES

- Cold Light - Adds No Heat To Process
- Fused Glass - Safe Process Light
- Compact 1" - 4" Tri-Clamp® Design
- Fiber Optic Bundle Mount Options
- Integral or Remote Momentary Switch
- LED, low maintenance
- 316L S.S. Design Can Be C.I.P.
- Pressures Through 3,000 PSI available
- Process Temperatures From -320° F (-195°C) to 650° F (340°C) available
- Stainless Steel or Hastelloy® Wetted Materials. Consult Factory for Additional Options.
- Long service life
- Fiber Optic Technology

HOW IT WORKS

The LED lighting system is designed to illuminate bio-reactors, fermentors, and sanitary vessels. The LED light is a fused glass light, which provides a high intensity, cold light source, to allow the process to be viewed under a true white light (5000° K color temperature). The cold light ensures that no heat is added to the process, which avoids unaccounted for heat sources in the reaction, while also ensuring there is no product bake-on. The LED lighting package provides a compact, cost effective lighting system, to meet all of your sanitary process needs. Each Canty LED light uses a high pressure, high temperature, fused glass hermetic seal, to completely isolate the light source from the process. The LED light can mate with a variety of couplings, including Tri-Clamp®, Tuchenhausen®, NA-Connect® or Sanitary.

STANDARD LIGHT SOURCE

All models feature 316L S.S. construction housing. A high output LED provides bright white light to illuminate the application. A momentary switch can be provided either integral to the light, or with a 42" switch cord. An alternative option is a light system supplied without a switch, with the on/off control in the user's scope. In all cases, a 25' (7.6 m) input power cable with cord grip is supplied, and can be wired to the appropriate power source.

APPLICATIONS

- Biotech Reactors, Fermentors & Sterilizers
- Sterile Process Tanks
- Aseptic Tanks
- Sanitary Areas & Glove Boxes
- Portable Tanks
- Freeze Dryers
- Many, many more

SPECIFICATIONS



Power Req:	24V DC, 120VAC, 230VAC
Housings:	NEMA 4X Sanitary, IP 66, 316L S.S. Construction
Wetted Materials:	316L S.S., Hastelloy® C-276, Hastelloy® C-22
Power supply:	Internal or Remote
Approx. Size:	3" [76mm] diameter x 8" [203mm] long
Weight:	4.5 lb [2kg]

MOUNTING CONNECTION

Available in:

- 1" - 4" Tri-Clamp®, NA-Connect® Process Connection Options
- Sight Glass Mount - 6" Rigid or 24"+ Flexible Fiber Optic Bundle
- Consult Factory for Additional Options

All registered trademarks are the property of their respective owners.

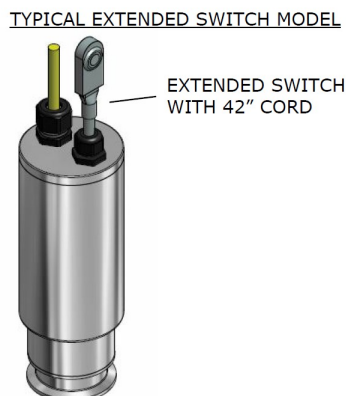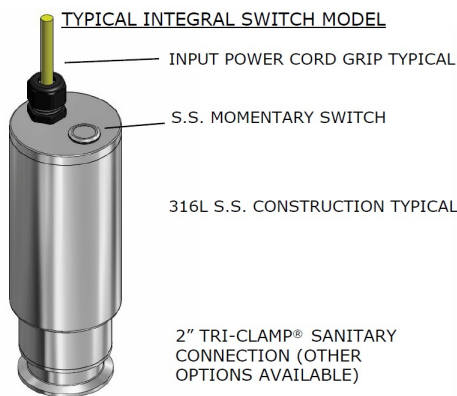

Direct Mount Ordering Information HHAS4F00-LED

EXAMPLE:


SWITCH OPTIONS	TIMER OPTIONS
INTEGRAL MOMENTARY SWITCH (standard includes timer): S - 24 Volt DC input, 1 amp H - 120 Volt AC input, .25 amp R - 230 Volt AC input, .25 amp EXTENDED MOMENTARY SWITCH - 42" CORD (no timer): G - 24 Volt DC input, 1 amp P - 120 Volt AC input, .25 amp NO SWITCH (standard includes timer): 9 - 24 Volt DC input, 1 amp C - 120 Volt AC input, .25 amp B - 230 Volt AC input, .25 amp	0 - Includes timer (standard, except on model prefixes "HG" and "HP") 2 - No timer (for momentary use)
POWER SUPPLY OPTIONS	MOUNTING CONNECTION
A - Integral. User supplies voltage specified above direct to light per model number selected. †Consult factory for other options.	D - 1"/1.5" NA-Connect® Sanitary Connection E - 1"/1.5" Tri-Clamp® Sanitary Connection F - 2" Tri-Clamp®/NA-Connect® Sanitary Connection G - 3" Tri-Clamp®/NA-Connect® Sanitary Connection H - 4" Tri-Clamp®/NA-Connect® Sanitary Connection
	WETTED MATERIAL
	S - 316L S.S.* D - Hastelloy® C-276 or equal* E - Hastelloy® C-22® or equal* U - Hastelloy® C-276 or equal, 20 Ra Electropolish finish 20 Ra mechanical finish standard. Additional finishes available.

Fiber Mount Ordering Information HHA10S0-LED

SWITCH OPTIONS	TIMER OPTIONS
INTEGRAL MOMENTARY SWITCH (standard includes timer): S - 24 Volt DC input, 1 amp H - 120 Volt AC input, .25 amp R - 230 Volt AC input, .25 amp EXTENDED MOMENTARY SWITCH - 42" CORD (no timer): G - 24 Volt DC input, 1 amp P - 120 Volt AC input, .25 amp NO SWITCH (standard includes timer): 9 - 24 Volt DC input, 1 amp C - 120 Volt AC input, .25 amp B - 230 Volt AC input, .25 amp	0 - Includes timer (standard, except on model prefixes "HG" and "HP") 2 - No timer (for momentary use)
POWER SUPPLY OPTIONS	BUNDLE SHEATHING MATERIAL
A - Integral. User supplies voltage specified above direct to light per model number selected. †Consult factory for other options.	S - 304 SS Sheathing
	BUNDLE LENGTH
	0 - 6" Rigid Bundle 1 - 24" Flex Bundle 2 - 36" Flex Bundle 3 - 48" Flex Bundle 4 - 60" Flex Bundle 5 - 72" Flex Bundle
	BUNDLE SELECTION
	1 - Single Leg Bundle, 400°F (205°C) Max at Tip



6" Rigid Bundle Model

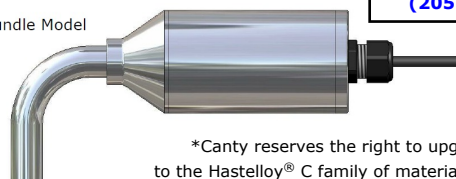

*Canty reserves the right to upgrade from Stainless Steel to the Hastelloy® C family of materials at no additional charge

CANTY

JM Canty Inc | Buffalo, NY USA
JM Canty Intl Ltd | Dublin, Ireland

Ph: (716) 625 4227
Ph: + 353 (01) 882 9621

Fax: (716) 625 4228
Fax: +353 (01) 882 9622